



# More Precision

**thermoMETER** // Non-contact infrared temperature sensors





### thermoMETER CTM-3XL

IR sensor for measurements in laser processing, laser welding and laser soldering

- Measuring range from 100 °C to 1800 °C
- Up to 85 °C ambient temperature without cooling
- Special blocking filter against laser radiation of all conventional diode, semiconductor and CO<sub>2</sub> lasers (from VIS to 1800 nm with 10.6 μm)
- Far Focus version for use with laser collimators
- Measuring wavelength of 2.3 μm minimizes errors due to emissivity uncertainty and misadjustment
- Sensor measures through glass lenses/sight glasses

#### Optical specifications thermoMETER CTM-3XL

□ = smallest spot size / focal point (mm)

##### Standard Focus

SF100	100:1	20	18.8	17.5	16.3	15.1	13.9	12.6	11.8	11	13.8	18	22.3	29.3	42
SF300 H1/H2/H3	300:1	20	17.8	15.6	13.3	11.1	8.9	6.7	5.2	3.7	5.9	9.1	12.3	17.7	27.4
distance in mm		0	150	300	450	600	750	900	1000	1100	1200	1350	1500	1750	2200

##### Close Focus

CF1-100	100:1	20	11	0.9	9.5	16.9	29.2	41.5	53.8	78.4	102.9	127.5	152.1	176.7	
distance in mm		0	40	85	120	150	200	250	300	400	500	600	700	800	

##### Close Focus

CF2-100	100:1	20	13.8	7.7	1.5	8.7	15.8	23	37.3	51.7	66	80.3	94.7		
CF2-300 H1/H2/H3	300:1	20	13.5	7	0.5	7.3	14.2	21	34.7	48.3	62	75.7	89.3		
CF3-100	100:1	20	15.5	11	6.5	2	7.5	13	24	35	46	57	68		
CF3-300 H1/H2/H3	300:1	20	15.2	10.4	5.5	0.7	5.9	11	21.4	31.8	42.1	52.5	62.8		
distance in mm		0	50	100	150	200	250	300	400	500	600	700	800		

##### Close Focus

CF4-100	100:1	20	18.3	16.6	14.8	13.1	11.4	9.7	7.9	6.2	4.5	7.2	12.7	18.1	23.6
CF4-300 H1/H2/H3	300:1	20	17.9	15.9	13.8	11.8	9.7	7.7	5.6	3.6	1.5	3.9	8.7	13.4	18.2
distance in mm		0	50	100	150	200	250	300	350	400	450	500	600	700	800

##### Far Focus

FF100	100:1	20	22	24	26	28	30	32	33.3	36	42.2	57.8	73.3	85	
FF300 H1/H2/H3	300:1	20	19	18	17	16	15	14	13.3	12	15.6	24.4	33.3	40	
distance in mm		0	450	900	1350	1800	2250	2700	3000	3600	4000	5000	6000	6750	

Model		CTM-3SF100XL-C3	CTM-3SF300XLH1-C3	CTM-3SF300XLH2-C3	CTM-3SF300XLH3-C3
Optical resolution <sup>1)</sup>		100:1	300:1	300:1	300:1
Temperature range <sup>2), 3)</sup>		100 to 600 °C	150 to 1000 °C	200 to 1500 °C	250 to 1800 °C
Spectral range		2.3 μm			
System accuracy <sup>4), 5)</sup>		± (0.3 % of reading +2 °C)			
Repeatability <sup>4)</sup>		± (0.1 % of reading +1 °C)			
Temperature resolution (digital)		0.1 °C			
Response time <sup>6)</sup>		1 ms (90 %)			
Emissivity/gain <sup>2)</sup>		0.100 to 1.100			
Transmissivity <sup>2)</sup>		0.100 to 1.100			
Signal processing <sup>2)</sup>		peak hold, valley hold, average; extended hold function with threshold and hysteresis			
Certificate of calibration		optional			
Outputs/analog		0/4 to 20 mA, 0 to 5/10 V, thermocouple J, K; alarm			
Outputs/analog	optional	relays: 2 x 60 VDC/42 VAC <sub>eff</sub> ; 0.4 A; electrically isolated			
Alarm output		open collector (24 V / 50 A)			
Outputs/digital	optional	USB, RS232, RS485, Modbus RTU, Profibus DP, Ethernet			
Output impedances	current output	mA max. 500 Ω (with 8 to 36 VDC)			
	voltage output	min. 100 kΩ load impedance, thermocouple 20 Ω			
Inputs		programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions)			
Cable length		3 m			
Power supply		8 to 36 VDC; max. 100 mA			
Protection class		IP65 (NEMA-4)			
Ambient temperature		sensor: -40 °C to 85 °C; controller: 0 °C to 85 °C			
Storage temperature		sensor: -40 °C to 125 °C; controller: -40 °C to 85 °C			
Relative humidity		10 to 95 %, non-condensing			
Vibration	sensor	IEC 68-2-6: 3 G, 11 to 200 Hz, any axis			
Shock	sensor	IEC 68-2-27: 50 G, 11 ms, any axis			
Weight		sensor: 150 g; controller: 420 g			

<sup>1)</sup> 90 % energy


<sup>2)</sup> adjustable via programming keys or software

<sup>3)</sup> target temperature > sensor temperature +25 °C

<sup>4)</sup> ambient temperature: 23 ± 5 °C

<sup>5)</sup> ε=1, response time 1 s

<sup>6)</sup> with dynamic adaption at low signal levels



## Product identification



CTM-	3	SF100XL-	C3
			Cable length [3 m]
			Focus [SF100 / SF300 / CF1 / CF2 / CF3 / CF4 / FF]
			Spectral range [2.3 µm]
			thermoMETER CTM

## Accessories page 40 - 43

- Mounting bracket
- Air purge collar
- Digital-interface kits
- Certificate of calibration

## CT / CTfast / CTM1/M2/M3


controller

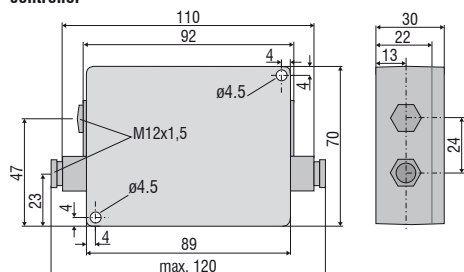ancillary CF lens  
(optional)


sensor

## CThot / CTP-3 / CTP-7

controller

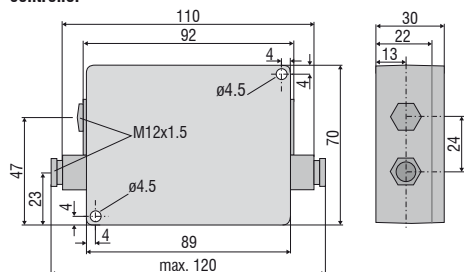


sensor with protective housing




## CTM3-XL



controller

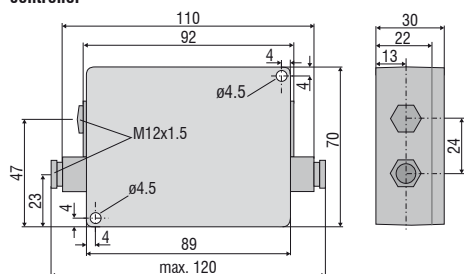

sensor



## CTex

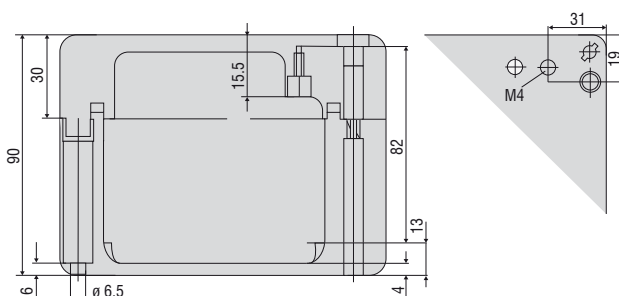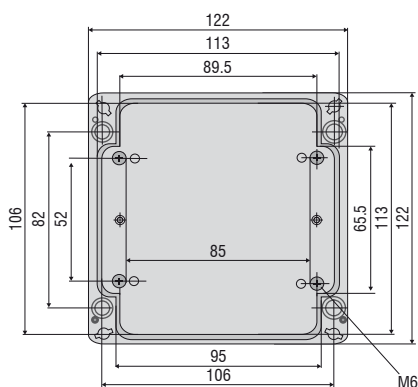

Mechanical accessories		
Art. No.	Model	
2970203	TM-FB-CT	Mounting bracket, fixed
2970325	TM-FB2-CT	Mounting bracket, adjustable in one axis, for simultaneous assembly of CT sensor and laser sighting aid
2970336	TM-FBMH-CT	Mounting bracket, adjustable in one axis, for massive housing
2970204	TM-AB-CT	Mounting bracket, adjustable in 2 axes
2970205	TM-MB-CT	Mounting bolts with M12x1 thread
2970206	TM-MG-CT	Mounting fork, adjustable in 2 axes, with M12x1 fastening
2970207	TM-AP-CT	Air purge collar for sensors from 10:1 lens
2970335	TM-APS-CT	Air purge collar for sensors from 10:1 lens made from stainless steel
2970208	TM-AP2-CT	Air purge collar for sensor with 2:1 lens
2970209	TM-APL-CT	Air purge collar, laminar
2970210	TM-APLCF-CT	Air purge collar, laminar with integrated ancillary CF lens
2970357	TM-APLCFH-CT	Air purge collar, laminar with integrated ancillary CF lens for M1/M2/M3/M5 sensors
2970386	TM-APMH-CT	Air purge collar made from stainless steel for massive housing
2970463	TM-TAS-CT	Pivoted joint for CT sensors
2970211	TM-RAM-CT	Right angle mirror for measurements 90 °C to the sensor axis
2970212	TM-RAIL-CT	Rail mount adapter for CT controller
2970213	TM-COV-CT	Closed cover for controller
2970214	TM-MHS-CT	Massive housing made from stainless steel
2970215	TM-MHSCF-CT	Massive housing made from stainless steel with integrated ancillary CF lens
2970358	TM-MHSCFH-CT	Massive housing made from stainless steel with integrated ancillary CF lens for M1/M2/M3/M5 sensors
2970216	TM-MHA-CT	Massive housing made from anodized aluminum
2970217	TM-MHACF-CT	Massive housing made from stainless steel with integrated ancillary CF lens
2970359	TM-MHACFH-CT	Massive housing made from anodized aluminum with integrated ancillary CF lens for M1/M2/M3/M5 sensors
2970326	TM-PA-CT	Pipe adapter for the mounting of reflection protection tubes
2970327	TM-ST20-CT	Reflection protection tube, length 20 mm
2970328	TM-ST40-CT	Reflection protection tube, length 40 mm
2970329	TM-ST88-CT	Reflection protection tube, length 88 mm
2970221	TM-LST-CT	Laser sighting aid for CT sensors incl. batteries (2xAlkaline AA)
2970300	TM-LSTOEM-CT	OEM laser sighting aid, 635 nm, 3.5 m cable, for connection to CT controller
2970300.008	TM-LSTOEM-CT(008)	OEM laser sighting aid, 635 nm, 8 m cable, for connection to CT controller

Optical accessories		
Art. No.	Model	
2970201	TM-CF-CT	Ancillary CF lens (only for SF models)
2970202	TM-PW-CT	Protective window (only for SF models)
2970297	TM-CFAG-CT	Ancillary lens with external thread
2970330	TM-CFH-CT	Ancillary lens for M1/M2/M3/M5 sensors
2970331	TM-CFHAG-CT	Ancillary lens with external thread for M1/M2/M3/M5 sensors
2970299	TM-PWAG-CT	Protective window with external thread
2970332	TM-PWH-CT	Protective window for M1/M2/M3/M5 sensors
2970333	TM-PWHAG-CT	Protective window with external thread for M1/M2/M3/M5 sensors

Interfaces		
2970223	TM-USBK-CT	USB interface kit: USB interface, USB cable, CompactConnect software, second cable gland for controller
2970224	TM-RS232K-CT	RS232 interface: RS232 interface, computer cable, CompactConnect software, second cable gland for controller
2970338	TM-RS485USBK-CTL	RS485-USB-adapter, incl. PC cable, CompactConnect software and CTmulti, second cable gland for use with interface board TM-RS485B-CT
2970226	TM-RS485B-CT	RS485 interface board incl. second cable gland
2970227	TM-CANK-CT	CAN-Bus interface for thermoMETER CT/ protocol: CANopen presets: module address 20 (14H), 250 kBaud, 0-60 °C
2970228	TM-PFBDPK-CT	Profibus-DPV1 interface for thermoMETER CT with plug-in connection
2970229	TM-ETHNK-CT	Ethernet-Kit: interface board, external Ethernet adapter, CompactConnect software, second cable gland
2970230	TM-RI-CT	Relay interface: two electrically isolated relays, 60 VDC/ 42 VAC <sub>eff</sub> , 0.4 A

Calibration		
2970231	TM-CERT-CT	Certificate of calibration
2970310	TM-HTCERT-CT	Certificate of calibration for CTM sensors

CTM3-XL		
2970352	TM-FBXL-CT	Mounting bracket, adjustable in one axis
2970353	TM-ABXL-CT	Mounting bracket, adjustable in 2 axes
2970354	TM-APXL-CT	Air purge collar, stainless steel
2970361	TM-XLCERT-CT	Certificate of calibration





TM-FB-CT Mounting bracket, adjustable in one axis



TM-AB-CT Mounting bracket, adjustable in two axes



TM-MB-CT mounting bolt with M12x1 thread adjustable in one axis



TM-MG-CT Mounting fork with M12x1 thread, adjustable in two axes



TM-RAIL-CT rail mount adapter for controller

TM-KF40GE-CT KF40 Flange with Ge window  
TM-KF40B270-CT KF40 Flange for CTM-1,-2,-3 with B270 window

TM-CF-CT Ancillary CF lens (only for SF models)

TM-CFAG-CT Ancillary CF lens with external thread  
TM-PWAG-CT Protective window with external threadTM-APL-CT Air purge collar, laminar and  
TM-MG-CT Mounting forkTM-APLCF-CT  
Ancillary CF lens/protective window - integrable variant  
for laminar air purge collarTM-APMH-CT  
Air purge collar made from stainless steel  
for massive housing

TM-PA-CT Pipe adapter for reflection protection tube



TM-ST40-CT Reflection protection tube





TM-LST-CT Laser sighting aid, battery-operated  
(2x Alkaline AA), for alignment of CT sensors  
(dimensions identical to CT sensor)




TM-FB2-CT  
Mounting bracket for sensor and laser sighting aid



TM-RAM-CT  
Right angle mirror



TM-MHS-CT Massive housing, stainless steel  
TM-MHA-CT Massive housing, aluminum



TM-TAS-CT Pivoted joint for CT sensors



Dirt and deposit on the lens like smoke, steam and high air humidity (condensation) are avoided or reduced by using an air purge collar.

TM-AP-CT  
Standard air purge collar for 10:1 / 15:1 / 22:1 lenses  
TM-APS-CT  
Air purge collar, stainless steel



TM-AP2-CT  
Standard air purge collar for 2:1 lens

## Further IR temperature measurement devices from Micro-Epsilon



**thermoIMAGER TIM**  
Compact USB thermal imaging cameras  
for precise thermography



**thermoMETER CTVideo/CSVideo**  
Infrared temperature sensors with crosshair  
laser sighting and video output



**thermoMETER Handheld**  
Innovative handheld pyrometer with laser  
sighting for inspection and maintenance